




# SLASHERS & MOWERS

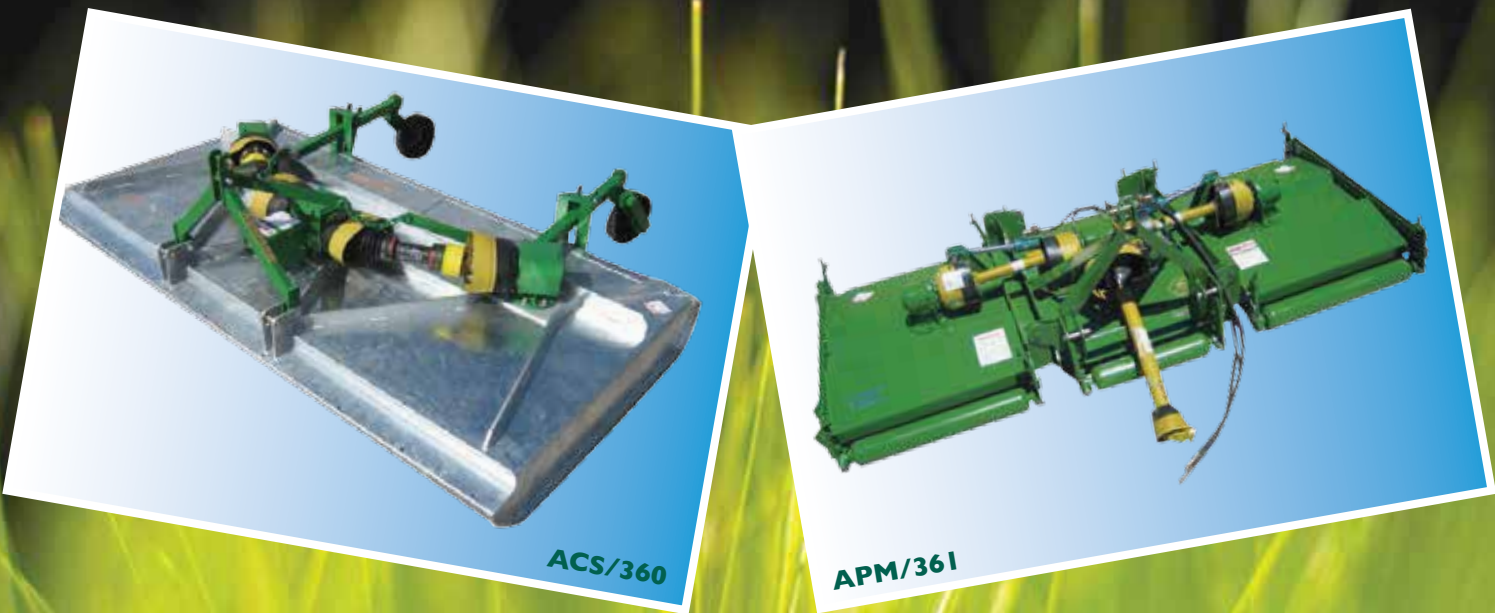

www.agrifarm.com.au

## Slasher & Mower Specifications

Model	Cutting Width cm	Cutting Ins	Min Power kW	hp	Cutting height	Weight kg	Transport Width	Options										
								Castor Wheels	Height Rollers	Rubber Guards	Chain Guards	Galvanised Body	Safety Standards	Floating Top Link	Chain Top Link			
<b>SLASHERS</b>																		
AES/120	120	48	18	25	0-8	180	138	N	N	S	O	N	N	N	N	N	O	
AES/135	135	54	22	30	0-8	220	150	N	N	S	O	N	N	N	N	N	O	
AHS/150	150	60	26	35	0-8	400	168	O	N	S	O	O	O	N	N	N	O	
AHS/180	180	71	41	55	0-8	480	198	O	N	S	O	O	O	N	N	N	O	
AHS/210	210	83	60	80	0-8	540	228	O	N	S	O	O	O	N	N	S	N	
ACS/150	150	60	30	40	0-8	480	170	O	O	N	S	O	O	O	O	N	N	
ACS/180	180	71	40	54	0-8	565	200	O	O	N	S	O	O	O	O	N	N	
ACS/210	210	83	52	70	0-20	800	226	S	N	N	S	O	O	O	O	N	N	
ACS/240	240	94	60	80	0-20	1000	256	S	N	N	S	O	O	O	O	N	S	
ACS/300	300	118	75	100	0-20	1100	310	S	N	N	S	O	O	O	O	N	N	
ACS/360	360	142	89	120	0-20	1220	370	S	N	N	S	O	O	O	O	N	N	
AHS/150 STS	150	60	26	35	0-8	400	168	S	N	S	O	O	O	N	N	N	S	
AHS/180 STS	180	71	33	45	0-8	480	198	S	N	S	O	O	O	N	N	N	S	
ACS/150 STS	150	60	30	40	0-8	480	170	S	N	S	O	O	O	N	N	N	N	
ACS/180 STS	180	71	40	54	0-8	565	200	S	N	S	O	O	O	N	N	N	N	
ACS/210 STS	210	83	52	70	0-8	800	226	S	N	S	O	O	O	N	N	N	N	
<b>MOWERS</b>																		
AFM/180	180	71	20	26	0-7	470	201	N	S	N	N	O	O	N	N	S	N	
APM/236	235	93	30	40	0-7	540	250	N	S	N	N	O	O	N	N	S	N	
APM/361	345	136	40	53	0-7	815	245	N	S	N	N	O	O	N	N	S	N	
<b>PASTURE TOPPER</b>																		
APT/236	235	93	34	45	2-15	490	250	O	O	O	O	O	O	N	N	N	N	

N = Not available    S = Standard    O = Option

Your Dealer



Manufactured by:  
**AG - ENGINEERING PTY. LTD.** ABN 15 168 153 419  
 Arkwright Crescent, Taree NSW 2430  
 TELEPHONE (02) 6552 6888 ~ FAX (02) 6551 0307  
 Email: sales@agrifarm.com.au  
 Web site: www.agrifarm.com.au

Ag - Engineering's policy is to continually review machine designs to improve performance. We therefore reserve the right to vary the specifications to those shown on this brochure.



AES/120

### AES

- \* 40 hp gearbox.
- \* 4 series drive shaft with friction clutch.
- \* Clevis hitch 3 point linkage.
- \* Laminated bisalloy blade beam with offset suction lift blades for clean cutting.
- \* Adjustable side skids - built-in blade trim.
- \* Body reinforcement layout eliminates entrapment of swath or water.

### AFM

Robust finishing mower for parks, ovals and turf farms.

#### Features

- \* All gearbox and shaft driven - no vee belts.
- \* Front and rear full width height rollers.
- \* 6 series drive shaft with friction clutch.
- \* High blade tip speed - for cleaner cutting.
- \* Bisalloy blade beam with pivoting blades.




AFM/180

### AHS

Heavy duty slasher for general farm pasture and small sucker regrowth slashing.

#### Features

- \* European manufactured gearbox.
- \* 6 series drive shaft with friction clutch.
- \* 5mm plate body with Z formed front and rear apron for maximum strength.
- \* Laminated bisalloy blade beam with offset suction lift blades.
- \* Adjustable side skids.
- \* Clevis hitch 3 point linkage.

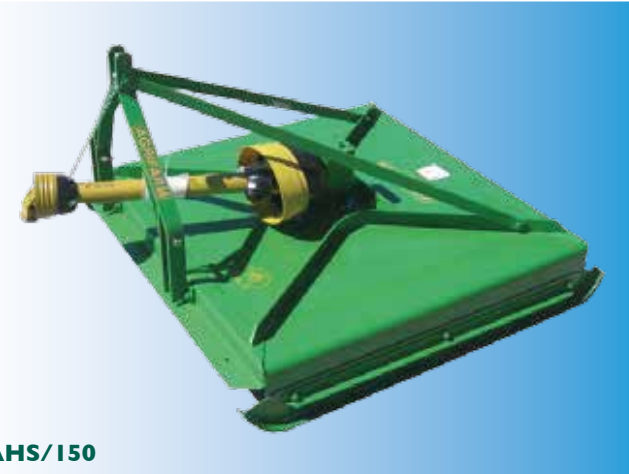

AHS/150

### SIDE THROW MODELS

AVAILABLE IN AHS & ACS.

#### Features

- \* STD with rear wheel kit.
- \* Chain top links.
- \* Adjustable opening side chute.
- \* Lifting throw blades.



AHS/180 STS

### APM 361

Three body section finishing mower designed to float independently on height rollers and follow the ground contour. Suitable for mowing large areas, ie parks, ovals and turf farms.

#### Features

- \* All gearbox and shaft drive.
- \* High ratio gearboxes produce optimum blade tip speed for excellent cut finish.
- \* 6 series input drive shaft c/w friction clutch, 6 series outer shafts c/w shearbolt clutches
- \* Front and rear height rollers on each section - screw adjustable.
- \* Monocoque welded body sections for added strength and easy clean.
- \* Hydraulically raised wings to a transport width of 2450mm.
- \* Bisalloy blade beams with pivoting blades.
- \* Can be front or rear 3 pt linkage tractor mounted.



APM/361



ACS/180

### ACS

Extra heavy duty slasher for contractors, local government bodies and farm clearing work

#### Features

- \* 8 series drive shaft with 4-6 plate friction clutch.
- \* High ratio gearbox - produces optimum blade tip speed.
- \* Heavily reinforced 5mm body, galvanising option. 300mm underbody clearance - to handle the heaviest crop.
- \* Floating headstock - slasher follows ground profile.
- \* Laminated bisalloy blade beam - offset suction lift blades.

### APT/236

High speed pasture topper to clean up uneven pastures.

#### Features

- \* All gearbox and shaft drive.
- \* High clearance body to reduce power requirements.
- \* High ratio gearboxes produce optimum blade tip speed.
- \* 6 series drive shaft with friction clutch.
- \* Adjustable side skids.
- \* Laminated bisalloy blade beam with pivoting blades.



APT/236